

AZQ6500



Rear View



Anti-Blackening

Intelligent Thermal Management

- Fan Cooling System :
Air Circulation by Fan cools down LCD panel temperature
- Heat Reduction Film & High Tri-Panel :
Heat Reduction Film applied on High Tri-Panel, blocking UV rays and emitting heat from inside

Filterless

Labor Cost-Saving

- AZQ6500 removed filters by the upgraded Air Circulation System.
- No burden to worry about a filter change
- Easy Maintenance System

No Need for Extra Housing

Multi-Configuration by Stand


- For Multi-Configuration, a stand is needed separately
- No need for an extra housing :
Full Outdoor with IP65 grade & Intelligent Thermal Management



*Spec & Product Image are subject to change for improvement in the development phase.

AZQ6500

Dimension & View

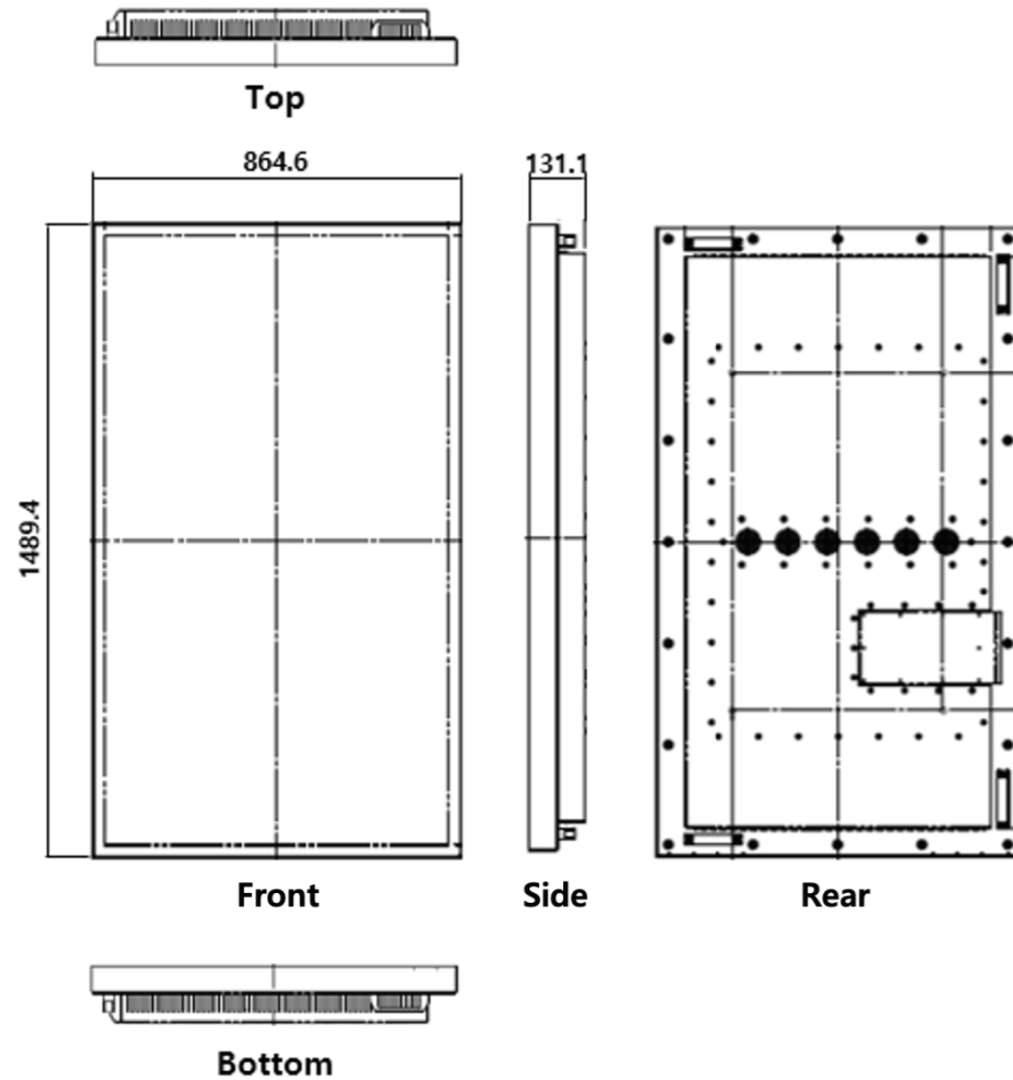

Specification

LCD Panel

Screen Size	65"
Active Display Area(w x h)	1428.48 * 803.52 mm
Resolution	1920 x 1080
Aspect Ratio	16:9
Display Colors	16.7M
Brightness (cd/m ²)/(max)	2,500
Viewing Angle (H°/V°)	178°/178°
LifeTime(Hrs)	50,000
Backlight Type	Direct LED

Power

Power Supply	100 ~ 240V
Consumption (Max)	<400W

PC

Operating System	Android 8.1
CPU	Amlogic S905X2 Quad Core
RAM	2GB
ROM	16GB
Port	USB3.0(1) USB 2.0(1) LAN Wi-Fi

Environmental

Temperature Operation	-30°C ~ 50°C
Humidity (Operation)	10% ~ 90%
Ingress Protection	IP65
Glass Impact Strength	IK10

Features

Auto Cooling System	Yes
Illuminance Sensor	Yes
Tempered Glass	Yes
Anti-Reflection Coating	Yes

Input/Output

HDMIx2 | VGAX1 | Audio inx1 | USBx1 | RS232C inx1

Monitoring Sensor

Internal Temperature	Yes
External Temperature	Yes
Humidity	Yes
Shock	Yes
External Ambient Light	Yes

Mechanical

Set (H x V x D)	34.0(H) x 58.6(V) x 5.2(D) inch
	864.6(H) x 1489.4 (V) x 131.1(D) mm
Packed (H x V x D)	(H) x (V) x (D) inch
	(H) x (V) x (D) mm
Tempered Glass	4T
Set Weight	138.9lbs / 63kg
Packed Weight	lbs/ kg

