

AZQ5500



Rear View



Anti-Blackening

Intelligent Thermal Management

- Fan Cooling Air Curtain System :
Air Circulation through Air Gap between Glass and LCD pane
- Heat Reduction Film & High Tni-Panel :
Heat Reduction Film applied on High Tni-Panel, blocking UV rays and emitting heat from inside

Filterless


Labor Cost-Saving

- AZQ5500 removed filters by the upgraded Air Circulation System
- No burden to worry about a filter change
- Easy Maintenance System

No Need for Extra Housing


Multi-Configuration by Stand

- For Multi-Configuration, a stand is needed separately
- No need for an extra housing :
Full Outdoor with IP66 grade & Intelligent Thermal Management

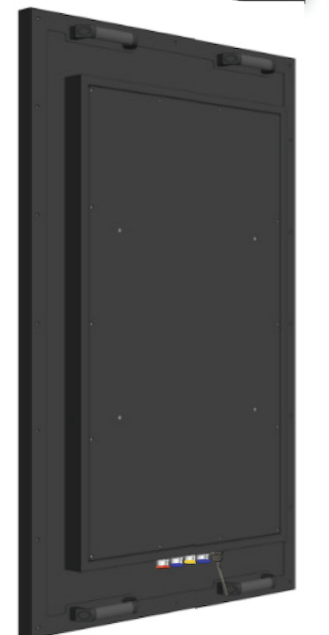

AZQ5500

Dimension & View

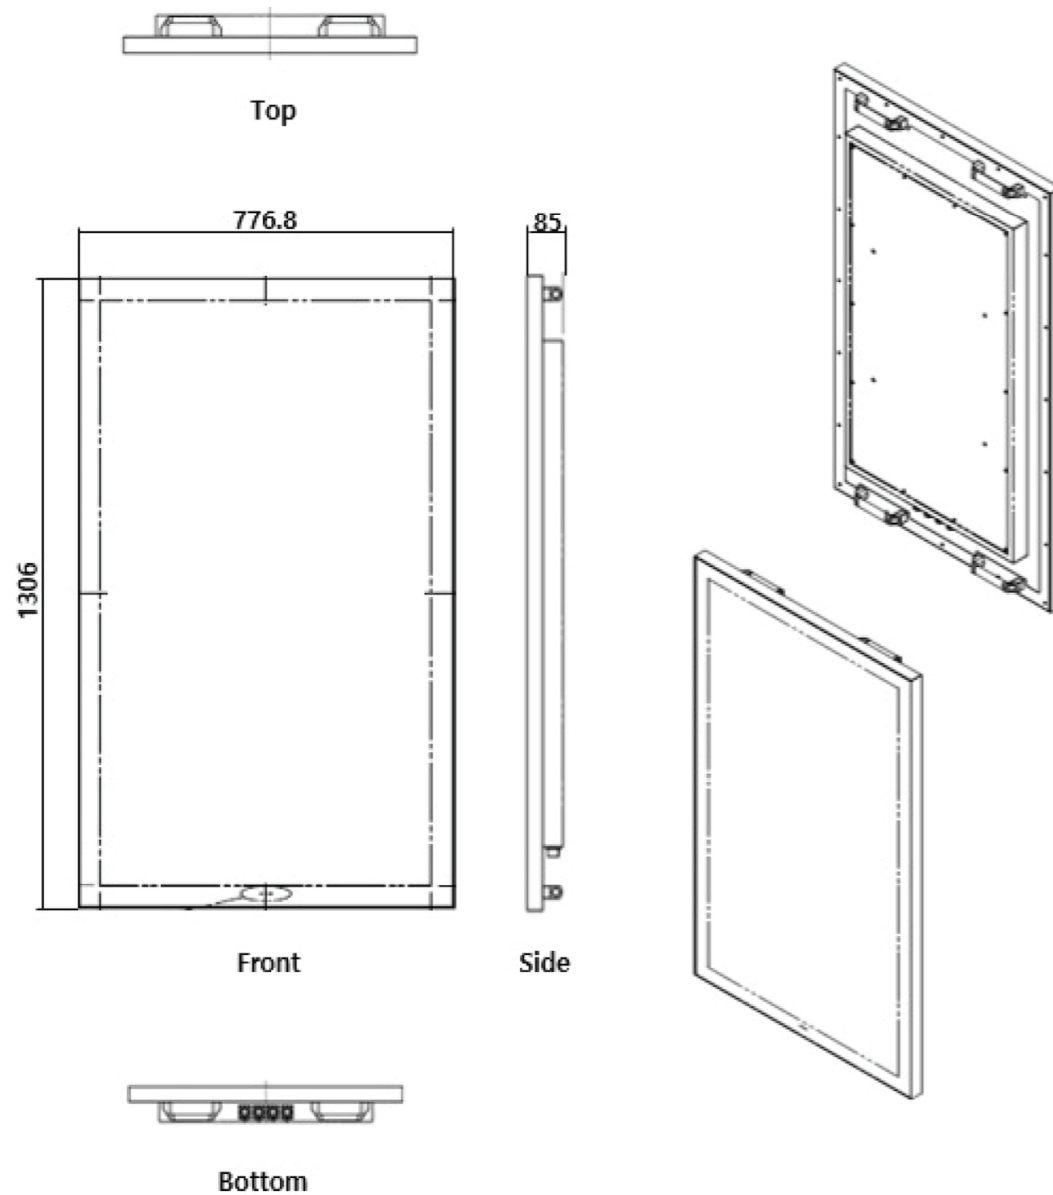

Specification

LCD Panel

Screen Size	55"
Active Display Area(w x h)	1209.6 * 680.4 mm
Resolution	1920 x 1080
Aspect Ratio	16:9
Display Colors	16.7M
Brightness (cd/m ²)/(max)	2,500
Viewing Angle (H°/V°)	178°/178°
LifeTime(Hrs)	50,000
Backlight Type	Edge LED

Power

Power Supply	100 ~ 240V
Consumption (Max)	<220W

PC

Operating System	Android 9.0
CPU	Cortex-A55 Quad Core
RAM	2GB
ROM	16GB
Port	USB3.0(1) USB 2.0(1) LAN 4G option

Environmental

Temperature Operation	-30°C ~ 50°C
Humidity (Operation)	20% ~ 80%
Ingress Protection	IP66
Glass Impact Strength	IK10

Features

Auto Cooling System	Yes
Illuminance Sensor	Yes
Tempered Glass	Yes
Anti-Reflection Coating	Yes

Input/Output

HDMIx1 | DVIx1 | VGAX1 | Audio inx1 | USBx1 | RS232C inx1

Monitoring Sensor

Internal Temperature	Yes
External Temperature	Yes
Humidity	Yes
Shock	Yes
External Ambient Light	Yes

Mechanical

Set (H x V x D)	30.6(H) x 51.4(V) x 3.3(D) inch 776.8 (H) x 1306 (V) x 85(D) mm
Packed (H x V x D)	39.4(H) x 57.5(V) x 29.5(D) inch 875(H) x 1390(V) x 185(D) mm
Tempered Glass	4T
Set Weight	130lbs / 59kg
Packed Weight	150lbs/ 68kg